



Exopack[™]
Advanced Coatings

Technical Data Sheet

Conductive Vinyl

Product 2252


These products use a paper or film support web. All values are with this web removed.

Attribute	Typical Value	Reference
Total Caliper	4.1 mils	T6139
Resistivity at 24°C	< 90 ohms/sq	T-1178
Basis Weight	118.8 g/m ²	TAPPI-410
Specific Gravity	1.17 g/cm ³	Calculated
Tensile Strength	> 9.0 lbs	T-0432
Elongation at Break	≥ 125%	T-0432
Modulus Elasticity	30,000 lbs/in ²	DMA
Shrinkage	< 4% @ 150°C	T-0431
Tg Temperature	3 °C	ASTM-D3418
Shelf Life	≥ 1 year	

Store between 50°F and 75°F (10°C and 24°C), away from direct sunlight and in the original packaging. Suspended rolls is the preferred method of storage.

Roll edge integrity should be protected for rolls that are stored flat.

Avoid double stacking.

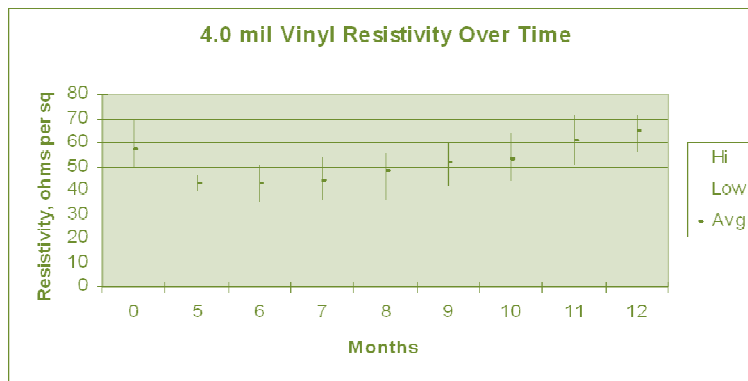

Values Listed above are for guidance purposes only and do not constitute a specification 03/20/07

Exopack[™] Advanced Coatings
700 Crestdale Street, Matthews, NC 28105, USA. Tel: +1 704 845 4419, Fax: +1 704 814 4307
Ash Road North, Wrexham Industrial Estate, Wrexham, LL13 9UF UK. Tel: +44 1978 660241, Fax +44 1978 661452
geninf@exopack.com www.exopackadvancedcoatings.com



Exopack[™]
Advanced Coatings

Exopack[™] Advanced Coatings
700 Crestdale Street, Matthews, NC 28105, USA. Tel: +1 704 845 4419, Fax: +1 704 814 4307
Ash Road North, Wrexham Industrial Estate, Wrexham, LL13 9UF UK. Tel: +44 1978 660241, Fax +44 1978 661452
geninf@exopack.com www.exopackadvancedcoatings.com