




Conductive Film Technical Data Sheet z-flo™ 2267

These products use a paper support web. All values are with this web removed.

Attribute	Typical Value	Reference
Total Caliper	2.3mils / 58μ	T6139
Resistivity at 24°C	< 95 ohms/sq	T-1178
Basis Weight	72 g/m ²	TAPPI-410
Tensile Strength	> 7.3 lbs	T-0432
Elongation at Break	>123%	T-0432
Modulus Elasticity	59,400 lbs/in ²	DMA
Shrinkage	<5% @ 150°C	<4% @ 150°C
Tg Temperature	-9°C	ASTM-D3418
Shelf Life	1 Year	

Store between 50°F and 75°F (10°C and 24°C) away from direct sunlight and in the original packaging. Suspension of rolls is the preferred method of storage. Roll edge integrity should be protected for rolls that are stored flat. Avoid double stacking.

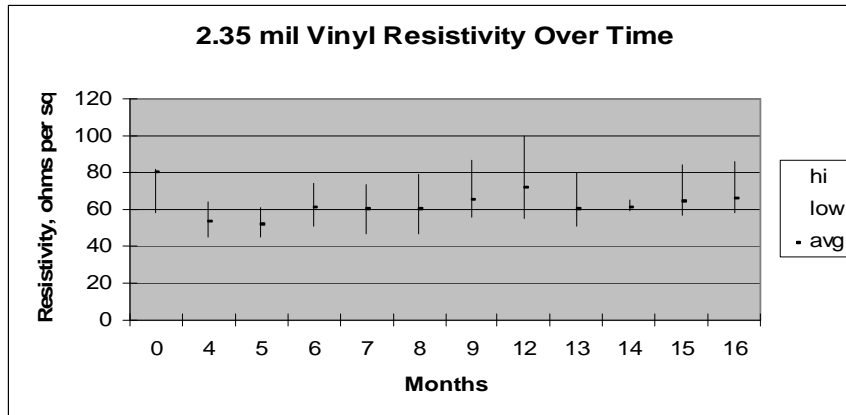

USA : 700 Crestdale Street, Matthews NC 28106-7003 Tel +1 800 688 9191/+1 704 847 9171 Fax +1 704 845 4307

UK: Ash Road North, Wrexham Industrial Estate, Wrexham, LL13 9UF Tel +44 (0)1978 660241 Fax +44 (0)1978 661452

www.exopackadvancedcoatings.com

(This Product Information Sheet is not intended by Exopack Advanced Coatings for use as a Product Specification or Warranty for the Product)